

»multifix« series

Proportional lubricators, oil can be filled under pressure.

Max. medium temperature: 60 °C  
 Max. ambient temperature: 60 °C  
 Sealant: NBR  
 Oil grade: CL 32 acc. to DIN 51517-ISO VG 32  
 Flow rate measurement: At  $P_1 = 6$  bar and pressure drop  $\Delta p = 1$  bar

Oil-mist lubricator with metal bowl and sight glass, metal (zinc-glass-NBR) sight dome


| Art. No. | Type No.  | Thread | Max. input pressure bar | Housing            | Flow rate l/min | Size | DN |
|----------|-----------|--------|-------------------------|--------------------|-----------------|------|----|
| 133122   | L 45 M-SR | G 1    | 20                      | Die-cast aluminium | 14000           | 4    | 25 |

Accessories / spare parts


| Art. No. | Type No.   | Description  |
|----------|------------|--|
| 135858   | ZW 45      | Mounting bracket with 2 screws                       |
| 135857   | KP 45      | Coupler pack for modular assembly of several devices |
| 135863   | KSS 45 NS  | Polycarbonate bowl, without drain valve              |
| 135864   | MS 45 NS   | Metal bowl, without drain valve                      |
| 100392   | 1233.7.990 | Sight dome (polyamide PA)                            |
| 100393   | 1233.7.909 | Sight dome, metal                                    |



flow characteristic

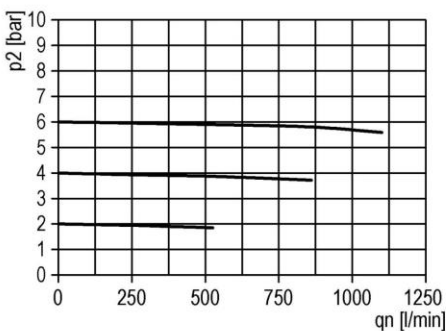

lubricator operating limit

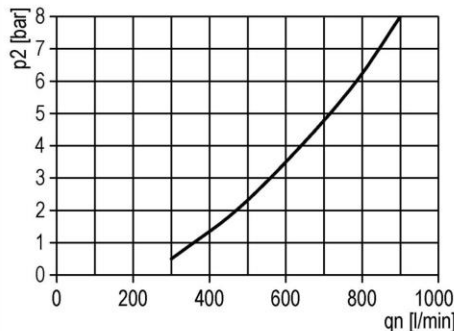

symbol

