


P40

Monoblock Directional Control Valve

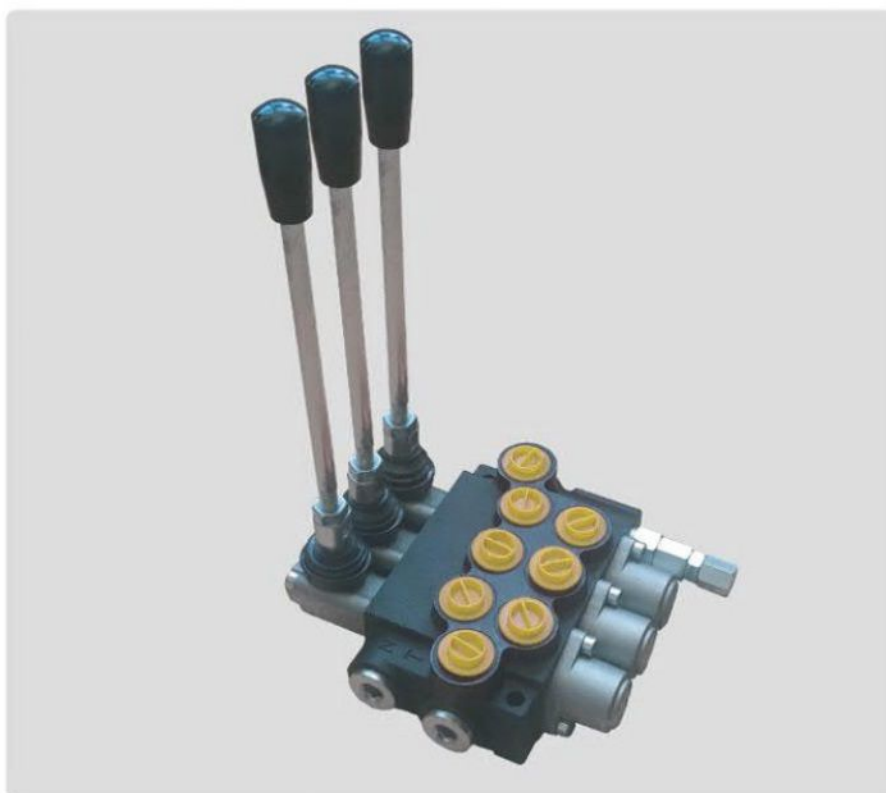

Specifications

Nominal flow rate		40 L/min	10.6 US GPM
Operating pressure (max)		250 bar	3626 psi
operating range		15 ~ 75 mm ² /s	15 ~ 75 cst
Viscosity	min	12 mm ² /s	12 cst
	max	400 mm ² /s	400 cst
Ambient temperature range		-40° ~ 80°C	-40° ~ 176°F
Structure		monoblock: 1~7 sections	

Monoblock Directional Control Valve

Technical drawing of a valve assembly, showing front and top views with dimensions.

Front View Dimensions:

- Total width: $A = 35 \times n + 71.5$
- Section widths: 30, 35, 30
- Total height: 212.5
- Vertical offsets from bottom: 13.5, 33, 18, 19
- Right side vertical offsets: 36, 10, 80, 100
- Bottom right offset: 53
- Thread specification: 6-G1/2
- Hole specifications: $\phi 9$ 通孔高 35, $\phi 9$ 通孔高 42

Top View Dimensions:

- Total width: $B = 35 \times n + 27$
- Section widths: 30, 35, 30
- Height: 53

