


TCF



(EU) N°10/2011

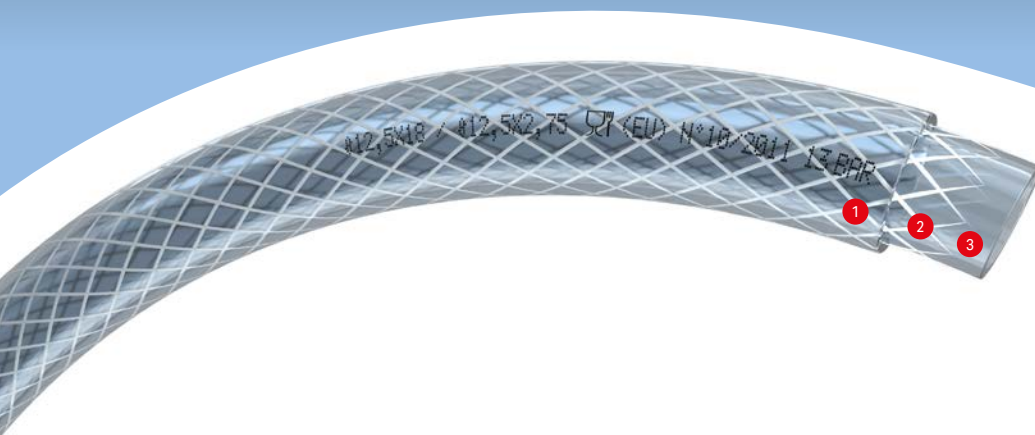

- 1 Flexible PVC
- 2 Polyester reinforcement
- 3 Flexible PVC

MULTIPURPOSE HOSE.

Three-layer design, in flexible, clear PVC, with high resistant polyester fibre reinforcement.

APPLICATIONS

Multipurpose hose suitable for numerous applications: compressed air hose for supplying pneumatic tools for equipping assembly work stations, wall-mounted or mobile dispensers, compressors

ALL SECTORS OF ACTIVITY

Automotive industry, assembly plants, plastics industry, construction, garages (for cars, lorries & agricultural machinery), woodworking etc.

SIMULANTS A, B, C, D1

- fruit juices
- wines
- alcohols
- milk

MARKING

Ø inn x Ø out / Ø inn x t. (EU) No 10/2011 SIM A,B,C,D1 [WP] BAR [Batch number]

ADVANTAGES

The materials used in TCF provide it with flexibility, high transparency, UV protection. It is suitable for contact with food products and even alcohols up to 50 % by volume can be carried.

Moreover, its balanced reinforcement provides good resistance to pressure and deformation at low pressures.

CONNECTORS

Quick connectors, swaged connectors, barbed or serrated connectors. band, worm drive, screw or butterfly clamps.

CHEMICAL RESISTANCE

TCF is suitable for various acids and alkalis. For more information please consult table pages 114 to 117 column A.

WARNING

Hydrocarbons make TCF quickly degrade. Please consult us.

	+/- mm		+/- mm		+/- mm		+/- mm		+/- mm	Transparent		Blue	Red
										25 m	50 m	25 m	25 m
6,3	+/-0,3	11	+/-0,5	2,35	77	40	13	50		149621	149622		
8	+/-0,4	13	+/-0,6	2,5	100	40	13	65		149635	149648	125675	
10	+/-0,4	15	+/-0,6	2,5	120	40	13	80		149651	149664	125691	125688
12,5	+/-0,5	18	+/-0,7	2,75	160	40	13	110		149677	149680	125717	125704
16	+/-0,8	22	+/-0,8	3	217	40	13	145		149693	149706		
19	+/-0,8	26	+/-0,8	3,5	300	40	13	174		149712	149725		
25	+/-0,8	33	+/-1,0	4	444	40	13	260		149738	149741		
30	+/-0,8	40	+/-1,0	5	670	36	12	300		149754	149767		
32	+/-0,8	41	+/-1,0	4,5	629	36	12	350		149770	149783		
38	+/-1,0	47	+/-1,2	4,5	733	33	11	400		149796	149809		
40	+/-1,0	50	+/-1,2	5	865	26	8	420		149812			
50	+/-1,0	60	+/-1,2	5	1056	24	8	500		149825			