




## Precision pressure regulator

### 637.92 to 637.94

G 1/4

0.05 to 2.0 bar  
 0.05 to 4.0 bar  
 0.05 to 7.0 bar



### Characteristics

Order No.	637.92	637.93	637.94
Port	G 1/4		
Pressure gauge port	G 1/8		
Medium	Compressed air, filtered 0.01 µm, oil-free		
Type of construction	Diaphragm pressure regulator with self-relieving design		
Max. input pressure p <sub>1</sub>	16 bar		
Control range p <sub>2</sub>	0.05-2.0 bar	0.05-4.0 bar	0.05-7.0 bar
Own air consumption at input pressure	< 2.2 l/min	< 3.0 l/min	< 4.1 l/min
	p <sub>1</sub> = 5 bar	p <sub>1</sub> = 7 bar	p <sub>1</sub> = 10 bar
Mounting position	Any / <b>note direction of arrow</b>		
Mounting type	Panel mounting, hole Ø12.5		
Medium temperature	Max. 60°C		
Ambient temperature	Max. 60°C		
Weight [g]	600		

### Description

- Double nipples (G1/4) required for block mounting with other devices
- Pressure setting can be locked with lock nut
- Flow direction indicated by arrows
- **Entry in direction of arrow**
- Pressure gauge **not** included, can be mounted at both ends
- Panel mounting with nut on cover
- Wall mounting with mounting bracket on body

### Applications

Precision regulator for use in open and closed-loop control systems in process engineering, the chemical industry, mineral oil production and refining, metallurgy, the paper industry, etc.

### Materials

Part	Material
Head piece (body)	Zinc - Z 410
Adjusting screw	Stainless steel
Double diaphragm	NBR-AI
Pilot diaphragm	NBR-AI-St
Fixed orifice	Stainless steel
Pressure spring	Galvanised steel
Valve cone, cmpl.	NBR-stainless steel-brass
Counter-pressure spring	Stainless steel
Bottom screw	Brass-NBR
Rubber spring	NBR

### Operation

- **The regulator is only allowed to be operated with micro-filtered air (filter rating 0.01 µm) (Section 1)**

### Main spare parts


**No spare parts can be supplied.**

**Regulators 637.92 to 637.94 are only allowed to be opened and repaired in the factory.**

### Accessories

Designation	Order
Mounting bracket	638.00


Dimensions [mm]

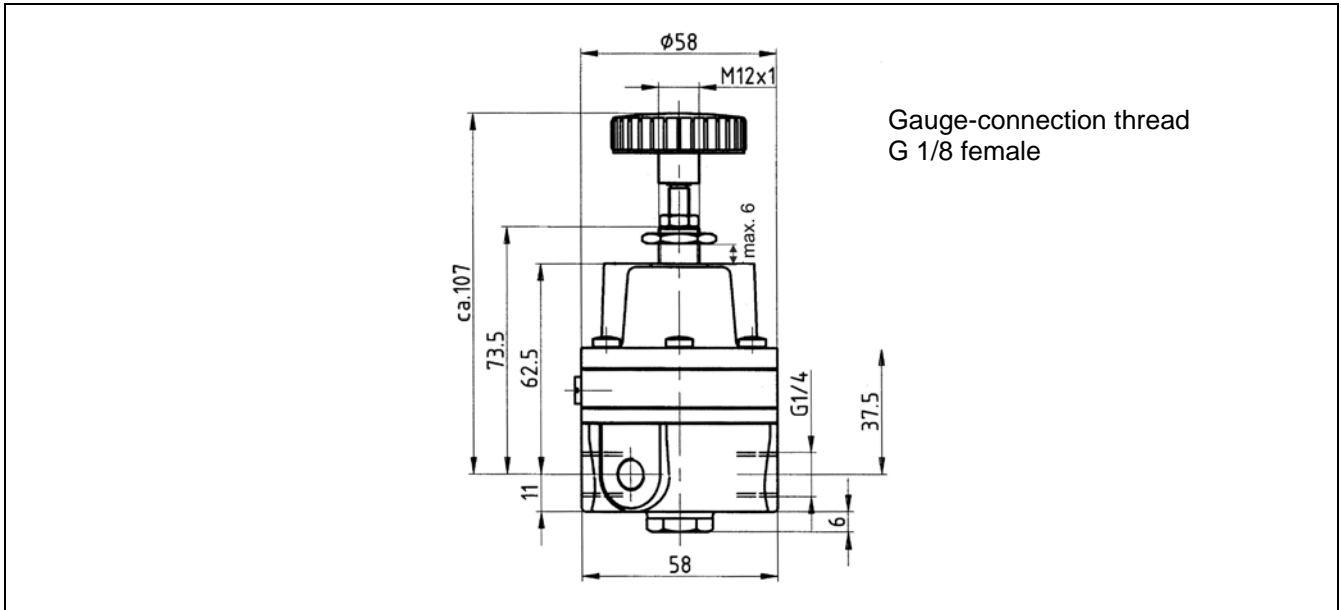

Flow characteristic

0,05 - 2 bar


$p_2$  [bar]       $p_1 = 5$  bar

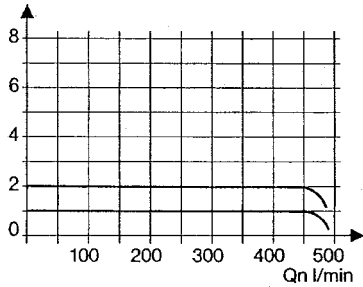

Flow characteristic

0,05 - 4 bar


$p_2$  [bar]       $p_1 = 7$  bar

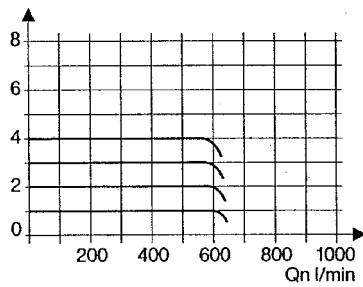

Flow characteristic

0,05 - 7 bar

$p_2$  [bar]       $p_1 = 10$  bar

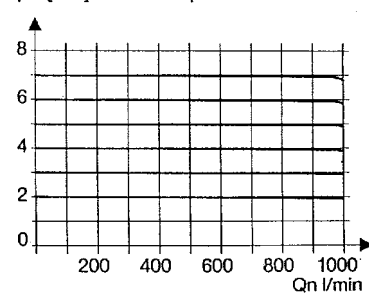

Hysteresis

Hysteresis of  $p_2$  as a function of rising (falling)

$p_1$  at a constant draw-off rate  $Q_N$  20 l/min

Basic setting (starting point):  $p_1$ : 7.0 bar

$p_2$ : 2.0 bar

$Q_n = 20$  l/min

