



**Plastic bowl  
for filters and lubricators**

→ Operating pressure: max. 16 bar  
→ Operating temp: max. 60 °C

**Description**

- Transparent plastic bowl
- Fixing with swivel nut
- Bowl guard made of galvanised sheet steel can be retrofitted (Main Catalogue)
- Label with maintenance instructions, pressure resistance and levels
- Condensate drain
- Manual, fully automatic (accessory), semi-automatic

**640/1 and 740/01**


- Fixing with thread on bowl

Designation	Material	Order No.
Condensate bowl	Polycarbonate	640/1-HA: 100357
Condensate bowl	Polycarbonate	640/2-HA: 100941
Condensate bowl	Polycarbonate	650/1-HA: 100946
Condensate bowl	Polycarbonate	650/2-HA: 100950
Oil bowl	Polycarbonate	740/01: 100383
Oil bowl	Polycarbonate	740/02: 101039
Oil bowl	Polycarbonate	740/03: 101042
Oil bowl	Polycarbonate	740/04: 101044

Accessories	Filters
65/0-N: 100677	Fully automatic drain valve (max. 12 bar)
	<b>General</b>
Bowl guards "SK"	See Main Catalogue

**O-ring and manual drain valve included !**

Dimensions														
Order No. Filter	A	B	C	D	E	F	Usable V/cm³	Order No. Lubricator	A	B	C	D	E	Usable V/cm³
640/1-HA	M 36x1.5	33.5	81.5				16	740/01	M 36x1.5	33.5	81.5			16
640/2-HA	43.5	39.5	94.0	32.0	5	14	25	740/02	43.5	39.5	94.0	32.0	5	40
650/1-HA	68.0	60.0	110.0	50.0	6	14	80	740/03	68.0	60.0	110.0	50.0	5	110
650/2-HA	76.0	69.5	127.0	57.5	6	14	80	740/04	76.0	69.5	127.0	57.5	6	135

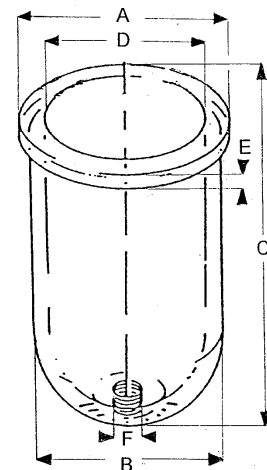

**Metal bowl  
for filters and lubricators**

→Operating pressure: max. 25 bar  
→Operating temp: max. 60 °C



**Description**


- Die-cast zinc bowl
  - Without label
  - Fixing with swivel nut
  - Condensate drain Manual, fully automatic (accessory), semi-automatic on request
  - **640/11 and 740/11**
  - Fixing with thread on bowl
  - **Only manual** condensate drain
- **Important: If a fully automatic drain valve is used, the maximum operating pressure is 12 bar or 16 bar**

Designation	Material	Order No.
Condensate bowl	ZN 410	640/11: 100358
Condensate bowl	ZN 410	640/12: 100942
Condensate bowl	ZN 410	650/11: 100947
Condensate bowl	ZN 410	650/12: 100951
Condensate bowl	ZN 410	650/13: 101012
Oil bowl	ZN 410	740/11: 100391
Oil bowl	ZN 410	740/12: 101038
Oil bowl	ZN 410	740/13: 101041
Oil bowl	ZN 410	740/14: 101043

Accessories	Filters
653.6.901: 100362	Fully automatic drain valve (max. 16 bar)
65/0-N: 100677	Fully automatic drain valve (max. 12 bar)

**O-ring and manual drain valve included !**

Dimensions														
Order No. Filter	A	B	C	D	E	F	Usable V/cm³	Order No. Lubricator	A	B	C	D	E	Usable V/cm³
640/11	M 36x1.5	33.5	81.5					740/11	M 36x1.5	33.5	81.5			
640/12	45	39.5	94.0	32.0	5	14	25	740/12	45	39.5	94.0	32.0	5	40
650/11	68	60.0	110.0	50.0	6	14	80	740/13	68	60.0	110.0	50.0	5	110
650/12	76	69.5	127.0	57.5	6	14	80	740/14	76	69.5	127.0	57.5	6	135
650/13	117	100.0	147.0	97.0	10	14	260							

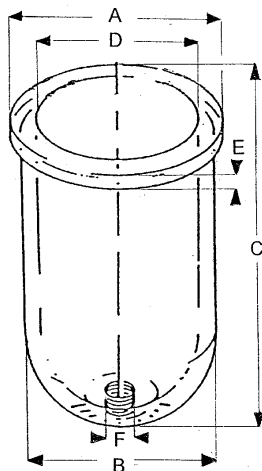

1.2

Data subject to change

01/2023