


Inline pressure regulator for up to 200 bar input pressure; suitable for compressed air, nitrogen and other neutral, compressed gases.

Working pressure:	Max. 200.0 bar
Working temperature:	-10 °C to +90 °C
Material:	Brass
Sealant:	NBR
Adjustment:	Knob (50.0 bar) Rotary switch (100.0 and 150.0 bar)
Flow direction:	According to the arrow (left to right)
Mounting position:	optional
Nominal diameter:	DN 3
Weight:	2200 g



637.912

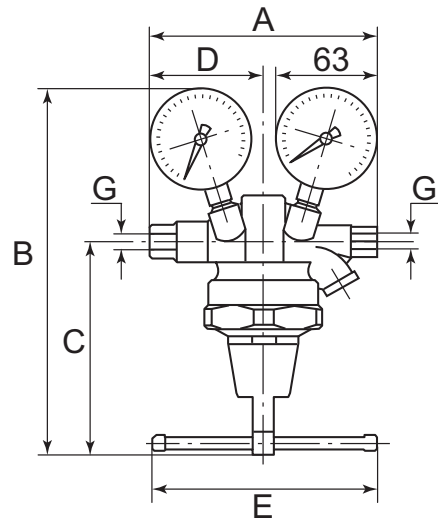

### Inline pressure regulators, incl. pressure gauge

Article No.	Ident No.	Thread	Control range bar	Flow rate l/min	A mm	B mm	C mm	D mm	E mm
639.11	101268	G1/4 female	1 – 50	2500	162.0	188.5	100.0	76.0	50.0
639.12	101269	G1/4 female	1 – 100	2700	162.0	213.5	125.0	76.0	130.0
639.13	101270	G1/4 female	1 – 150	2900	162.0	213.5	125.0	76.0	130.0