


Straight-way type, stainless steel.

The flow is allowed only one side. Generally the direction according to the on the non-return valve body identified arrow. The other side remains locked.



Applications	Pneumatic systems with filtered and lubricated compressed air
Body	Stainless steel 1.4404
Spring	Stainless steel 1.4319
O-ring	FPM
Opening pressure	0.2 bar
Operating pressure	max. 10 bar
Operating temperature	-10 °C to +150 °C

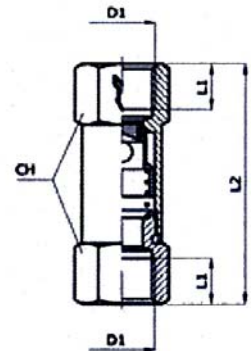

Non-return valves, stainless steel							
Art. No.	Ident No.	Thread	CH mm	L1 mm	L2 mm	Flow rate (6 bar)	Weight gr
228.01-ES	103847	G 1/8	13	8.0	40.0	920 NI/min.	27.0
228.02-ES	103848	G 1/4	16	9.0	48.0	2200 NI/min.	38.0



228.01-ES

Construction non-return valves:



- 1 = Body - stainless steel AISI 316L
- 2 = Valve
- 3 = Seal - FPM
- 4 = Spring - AISI 302