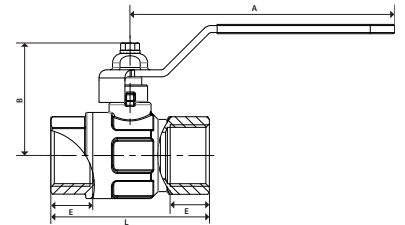


Brass ball valve with free flow, DVGW approved.

This valve complies with the European standard EN 13828 and the working paper DVGW W 570 and is therefore approved for use with drinking water.

The special ball technology prevents bacteria from forming inside the valve if it is not in use for a long period of time (i.e. the valve is absolutely safe for drinking water).

Body:	Chrome-plated brass
Ball:	Chrome-plated brass
Hand lever:	Steel with plastic coating
Ball seal:	PTFE
Stem seal:	NBR / FKM
Operating temperature:	-20 °C to +150 °C (no steam)
Standard thread:	Thread acc. to ISO 7-1

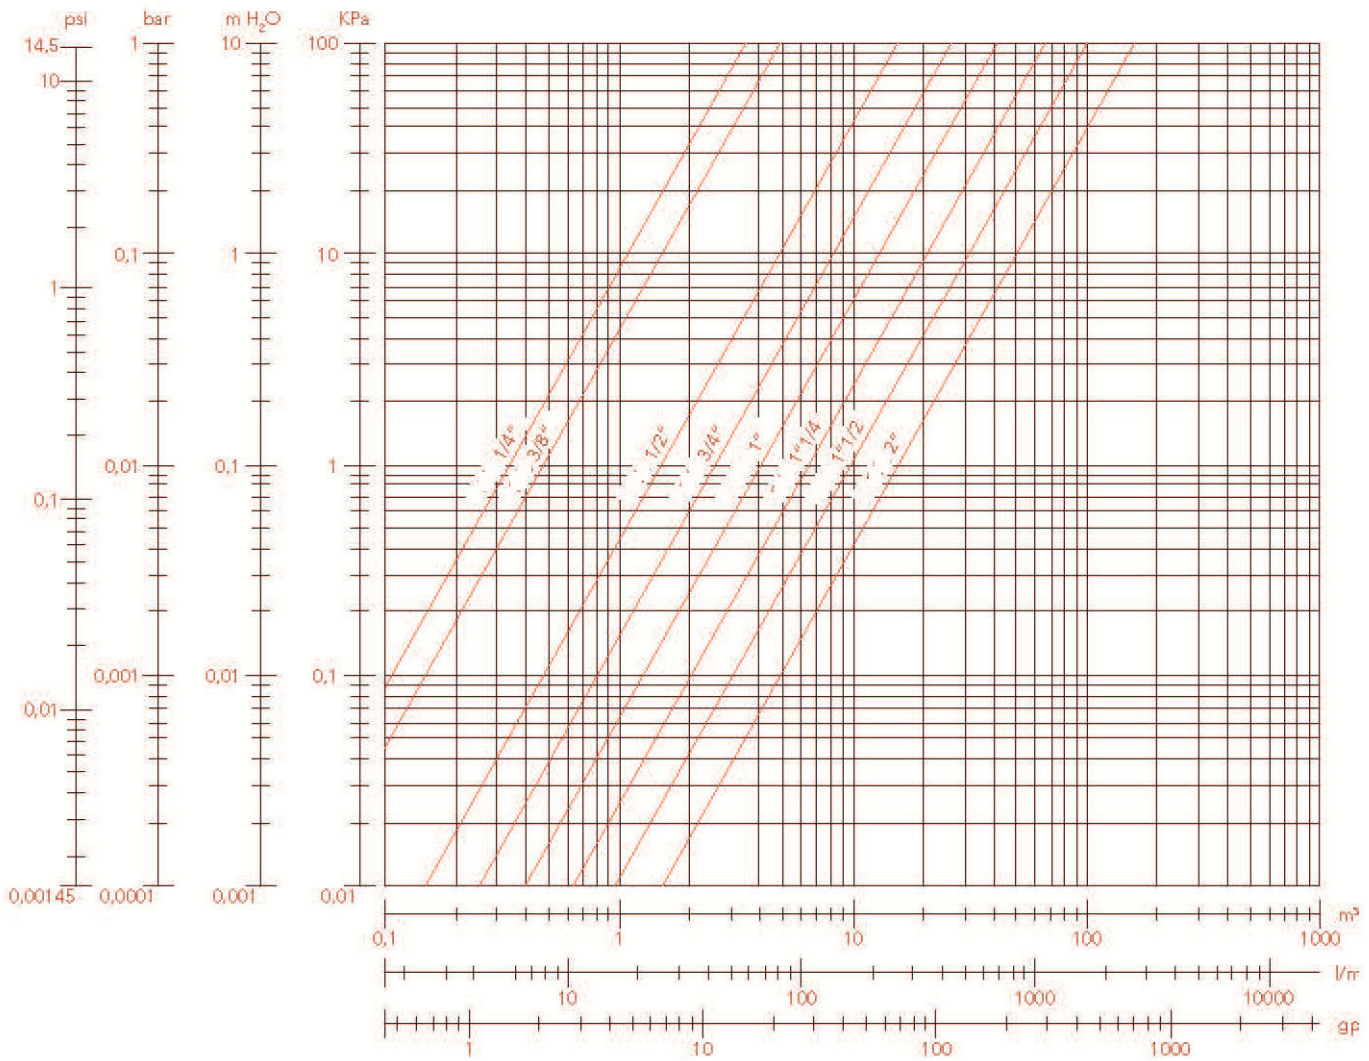

Potable water ball valves with hand lever, female/female thread

Art. No.	Ident No.	Thread	DN	PN bar	A mm	B mm	L mm	E mm	a/f mm
3350.701	103406	Rp 1/4	8	50	85.5	41.8	49.5	11.0	18
3350.702	103407	Rp 3/8	10	50	85.5	41.8	52.4	11.4	21
3350.703	103408	Rp 1/2	15	50	92.5	50.3	61.0	15.0	25
3350.704	103409	Rp 3/4	20	40	113.5	56.3	68.0	16.3	31
3350.705	103410	Rp 1	25	40	113.5	60.3	85.0	19.1	38
3350.706	103411	Rp 1 1/4	32	30	138.0	76.3	99.5	21.4	47
3350.707	103412	Rp 1 1/2	40	30	158.0	91.8	109.0	21.4	54
3350.708	103413	Rp 2	50	25	158.0	98.8	130.0	25.7	66

Art. No. 103413 = discontinued product. No longer available. New product 133168 (350.7708)



3350.705



	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
Ø	10	10	15	20	25	32	40	50
Kv	3,21	4,88	15,32	25,96	41,29	63,27	100	167