

With digital display, 2-colour.

Electronic pressure switch with digital display in stable plastic housing for monitoring and measuring pressures in dry, oil-free compressed air and non-toxic, non-aggressive gasses.

Areas of application: Pneumatics, machine tools, compressors, automation technology and in general machine construction.

Output signal: 2 x digital NPN or PNP, 1 x analogue 1 – 5 V or 4 - 20 mA
 Selectable units: MPa, kgf/cm², bar, psi

Hysteresis adjustable. Menu guided setting using three large buttons and easy to read 2-colour digital LCD display. Installation location selectable.

Electrical connection	2 m cable, open cable ends
Ambient temperature	-10 °C to 60 °C
Medium temperature	0 °C to 50 °C
Measuring range	0 - 10 bar
Power supply	12 - 24 V DC ± 10 %
Housing	Plastic
Wetted parts	MSV
Process connection	G 1/8
Accuracy	±2 % F.S. ± 1 digit
Protection IP	IP 40 / IP 65 (with hose)



EDS010PNP15G

Electronic pressure switch with digital display

Art. No.	Type No.	Output signal
133157	EDS010NPN15G	2 x NPN outputs + 1 x analog output 1 - 5 V
133158	EDS010NPN420G	2 x NPN outputs + 1 x analog output 4 - 20 mA
133159	EDS010PNP15G	2 x PNP outputs + 1 x analog output 1 - 5 V
133160	EDS010PNP420G	2 x PNP outputs + 1 x analog output 4 - 20 mA

Accessoires for electronic pressure switch with digital display

Art. No.	Type No.	Description
133153	EDS010-BFWW	Metal mounting bracket, horizontal
133154	EDS010-BFWS	Metal mounting bracket, vertical
133155	EDS010-EBR	Plastic installation frame
133156	EDS010-EBRSA	Installation frame with plastic protective cover



EDS010-BFWW



EDS010-BFWS



EDS010-EBR



EDS010-EBRSA



Department eDocumentation

Phone +49 7125 9497-41, -42, -53, -260, -330
 Fax +49 7125 9497-99
 e-mail: eDocumentation@riegler.de

edition 10/2016

RIEGLER & Co. KG
www.riegler.net

Subject technical changes.

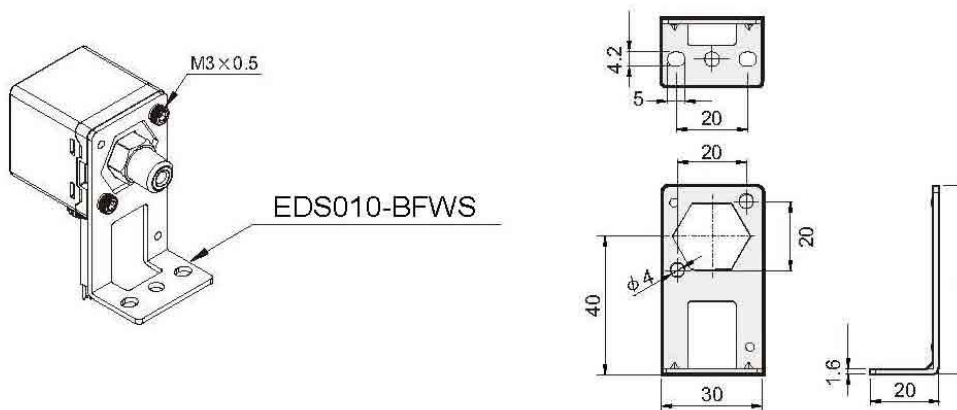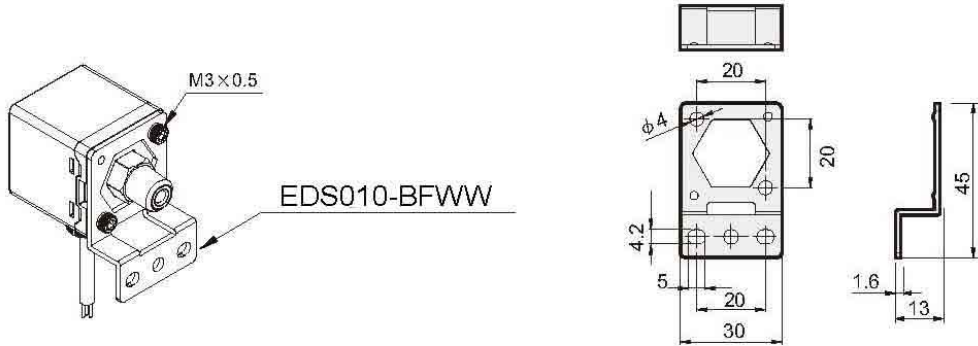

Installation frame with plastic protective cover

